

---

# A Demonstration of Energy & Water Savings Potential from Optimal Irrigation Management and Precision Application

## **Charles Hillyer, Chad Higgins, Marshall English**

Oregon State University , 116 Gilmore Hall, Corvallis, OR, 97333; hillyer@enr.orst.edu, chad.higgins@oregonstate.edu, marshall.english@oregonstate.edu

## **Geoff Wickes, Lori Rhodig**

Northwest Energy Efficiency Alliance, 421 SW Sixth Avenue, Suite 600, Portland, OR 97204; GWickes@neea.org, LRhodig@neea.org

## **Jac le Roux**

Irrinet LLC, 910 E 10th Street, The Dalles, OR 97058; jac@irrinet.net

## **Bob Evans**

Northern Plains Agricultural Research Laboratory, USDA-Agricultural Research Service  
Supervisory Research Agricultural Engineer And Research Leader, 1500 N. Central Ave., Sidney, MT 59270; robert.evans@.ars.usda.gov

**Abstract.** *Optimal irrigation management is being demonstrated on three farms in Oregon, Washington, and Idaho, during 2012 as part of a multi-year effort to develop and demonstrate the effectiveness and profitability of an integrated solution. Integration includes high resolution soil mapping, variable rate irrigation, on-site ET, capacitance and neutron probe soil moisture measurements, optimal irrigation methodologies, flow meters, energy use monitoring via smart meters and yield mapping of results. The objective of the demonstrations is to show increased profitability based on optimizing inputs. Initially the information from each of these sources is integrated into a management system, Irrigation Management Online, specifically designed to schedule irrigations when water supplies are limited. The management system provides optimized scheduling based on multiple information sources and includes the grower as a critical component of the decision process. This paper will present the preliminary results from the 2012 season and describe plans for following years.*

**Keywords.** Irrigation Optimization, Variable Rate Irrigation.

## Introduction

The demand for fresh water is projected to exceed renewable supplies by 2025 (Postel et al., 1996). The world demand for food is increasing because of increased population size and increased demand for resource intensive products (beef, poultry, etc). For irrigated agriculture, at the intersection of these two resource limitations, water shortages will become not only common but even standard operating conditions. This leads to the obvious conclusion that changes must occur, and agriculture, the largest consumer of fresh water, is expected to make big changes in water use. Part of the solution is expected to come from improvements in crop characteristics to reduce water needs and increase stress tolerance (Baulcombe, 2010). However, it is generally recognized that the developing water shortages will also force fundamental changes in the way irrigation is managed (English et al., 2002). Irrigation management will necessarily move from simple stress avoidance (a biological objective) to optimization based on net returns to water (an economic objective). Much more sophisticated irrigation management tools will be needed to support optimal decision making in a water-limited future. These tools will be driven by technologies for environmental monitoring, operational monitoring, and precision irrigation. The complexity of such optimal irrigation advisory tools will require a development foundation that facilitates integration of technologies and information from a variety of sources. However, adoption of these technologies will, as with any new technology, be limited by its economic viability. The object of the project described here is to demonstrate the economic potential of optimal irrigation in general and variable rate irrigation in particular.

The demonstration project will achieve the following:

1. Demonstrate savings in water and energy associated with optimal, variable rate irrigation.
2. Determine the cost effectiveness of current irrigation technologies by balancing the capital investment against financial gains from energy and water savings.
3. Determine the relative value of each data source (instrument), both in terms of decision making power and dollars.
4. Provide the foundation for development of data exchange standards and an Application Programming Interface for irrigation management.

## Optimal Irrigation

Economically optimum irrigation management is fundamentally different, and more difficult, than conventional irrigation. Economically optimal irrigation implies some level of deficit irrigation (English et al., 1990), (English and Raja, 1996), (English and Nuss, 1982). While the conventional paradigm is to irrigate as needed to avoid crop stress, deficit irrigation involves controlling crop stress in spatially variable fields. The conventional method is essentially a balancing of irrigation and evapotranspiration. Optimal irrigation scheduling is a decision process. The information needed to implement optimal scheduling is orders of magnitude more complex than conventional scheduling. The irrigation manager must account for soil heterogeneity, the spatial variability of applied water and crop responses to water stress. This complexity is increased by the fact that fields are not managed in isolation; the entire farm is considered when allocating water supplies. Accounting for these factors will require: (i) explicitly characterizing field heterogeneity, the uniformity of applied water; (ii) modeling the disposition of applied water; (iii) estimating crop yields under variable water stress conditions; and (iv) quantifying the marginal costs of crop production (largely energy costs in the case of the farms that will be the focus of this project). For this reason, sophisticated modeling and management tools are needed to implement optimal scheduling.

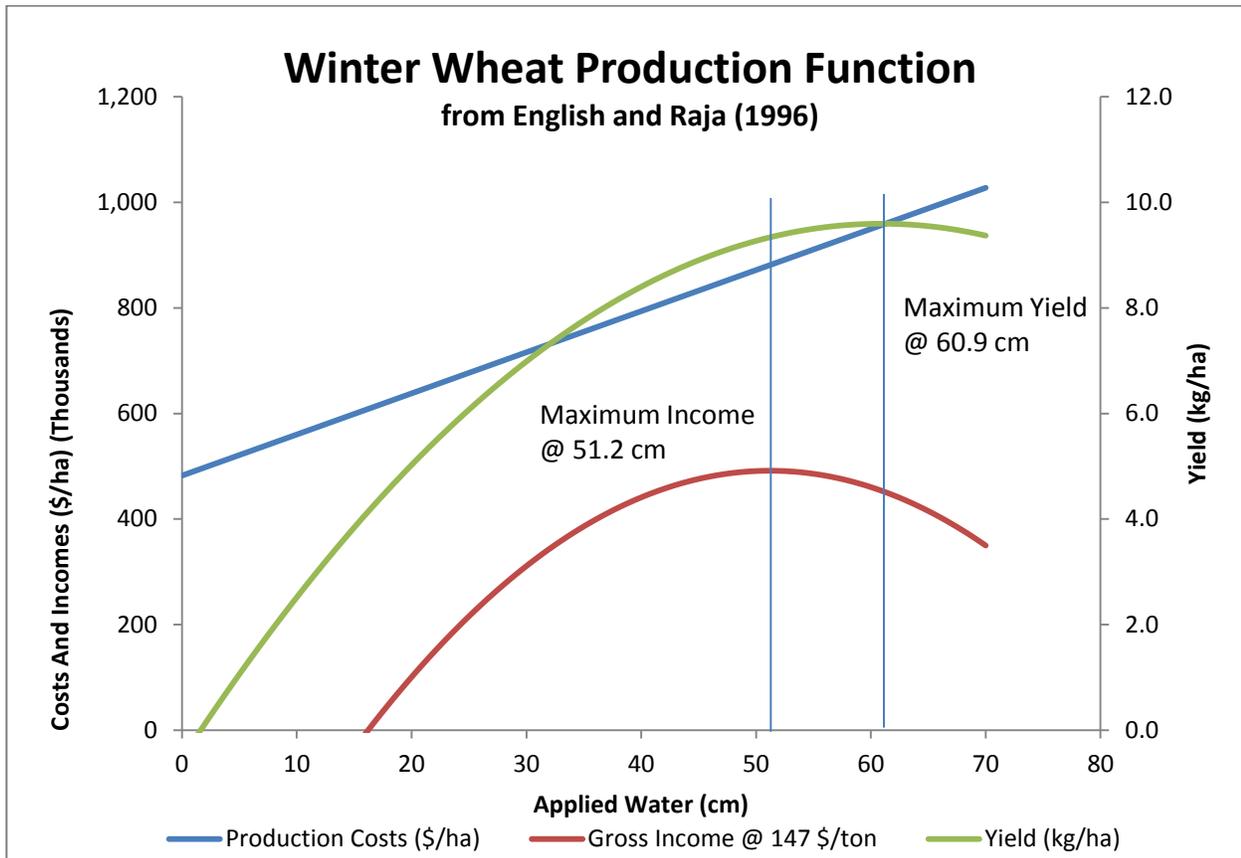


Figure 1 A production function developed for Winter Wheat at Hermiston, OR. The maximum income occurs when the water application is 16% less that that required for maximum yield. This reduction in water application results in a reduction of crop water use which is the deficit in Deficit Irrigation.

Irrigation affects and is affected by nearly all farm operations. Limitations on resource availability increase the complexity of the effects on irrigation management. To include these constraints in an optimization algorithm involves codifying the constraints in a manner appropriate for an optimization framework. Encoding all possible constraints is not an achievable goal because we cannot possibly know all the constraints *a priori*. Including most of the constraints would still involve constructing quantitative representations of the different farm processes. Instead of building a simulation of the whole (or nearly whole) farm enterprise, IMO takes a different approach. The central thesis of IMO is that the best way to implement or express these constraints is to build a system that includes the only entity that is aware of all these constraints: the grower.

This system, known as Irrigation Management Online (IMO), explicitly analyzes irrigation efficiency and yield reductions for deficit irrigation, performs simultaneous, conjunctive scheduling for all fields in the farm that share a limited water supply, and employs both ET and soil moisture measurements in a Bayesian decision analysis to enhance the accuracy of the irrigation schedules. IMO is described in detail in (Hillyer, 2011), and (Hillyer et al., 2009); the complete details of its implementation are beyond the scope of this paper.

## An Integrated Approach

A wide variety of technologies and methods have been developed for irrigation management. The technologies for Center Pivot control have been reviewed by Kranz et al. (2012) and the potential for adaptive control was analyzed by McCarthy et al. (2011). Many of these technologies still operate in

isolation. Integrating the information to produce an irrigation schedule requires a significant time investment for the irrigation manager. This systems integration task is part of the focus of the demonstration and the overall project. The goal is to produce a system that demonstrates the potential time and effort savings obtainable from automating the data integration task. Furthermore, the data being integrated will be used to drive the IMO system to produce additional value in the form of more precision for irrigation management. Figure 2 shows a conceptual overview of the data sources that will be integrated.

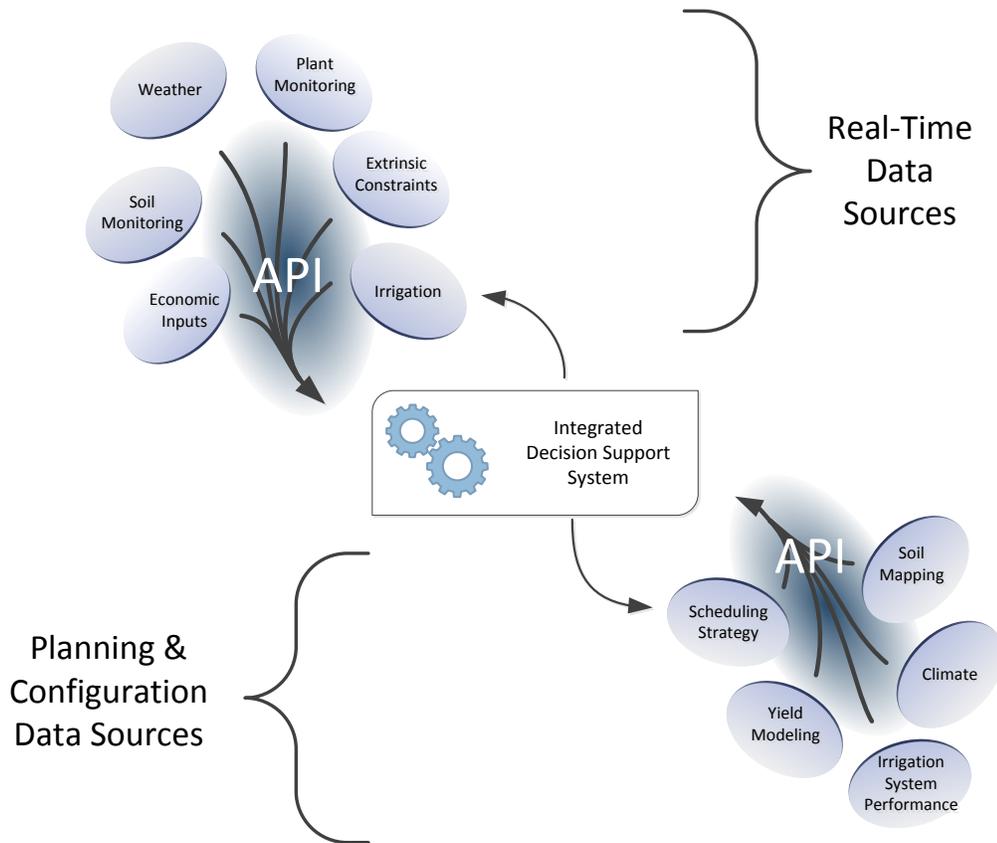


Figure 2 Conceptual overview of the integrated system

Data acquisition is only one part of the scheduling process shown in Figure 2. Making data easy to obtain and presenting it in clear ways is a valuable feature but the real power of irrigation schedulers lies in the potential for using the information to drive calculations. In this sense, an irrigation scheduler is also a decision support system. Mohan and Arumugam (1997) indicated that Expert Systems are viable and effective tools for irrigation management and stressed the need to include other aspects of irrigation management such as canal and reservoir operation. This need was also indicated by Clyma (1996) who concluded that scheduling services are not adequately integrated with other farm operations that hold greater importance than irrigation decisions. The need for combining irrigation tools with crop growth models has been emphasized in the past (Wolfe, 1990) and continues to be emphasized more recently (Woodward et al., 2008). The cost of Developing the yield response functions that are needed for optimal management is a limiting factor, however Variable Rate Technology does make this more feasible (Bullock et al., 2009).

One of the goals for this demonstration is for the benefits of system integration be transferrable beyond the scope of this demonstration project. To that end, development of data exchange

standards and an Application Programming Interface for irrigation management is being developed in parallel with the demonstration projects. The details of the API are beyond the scope of this paper. Once the demonstrations are complete, an open source version of the IMO system, including the systems integration features, will be made available. The open source release will serve as an example for other interested developers. Serve as a “guinea pig” for (rather than a competitor to) informing future development of irrigation management systems.

## **Variable Rate Irrigation**

Site-Specific Variable Rate Irrigation (VRI) is a system where a center pivot irrigation system is equipped with the capacity to actuate valves for groups of sprinklers, or to regulate its speed during operation. A control system is used to open and close the valves at various rates (or change the speed) based on the position of the pivot and a desired application depth. VRI systems have been described in detail by (Evans et al., 2012), (Evans and King, 2010), and (Sadler et al., 2005). One aspect of VRI that has not been studied is the potential for mitigating some of the undesirable effects of deficit irrigation. When deficits are imposed on a field they are generally estimated based on an average for the whole field. Because no field is completely uniform, some areas of the field will experience more stress than the targeted amount. This can produce visibly bad areas of yield response even though the overall yield response is still optimal. By using the VRI system, it may be possible to produce increased uniformity of yield response and improve the qualitative effect of visibly bad areas in a field.

To test this theory the IMO system will manage two fields (with the same crop) at the same. One of the fields will be managed with a VRI system and the other with a uniform system. After harvest the shape of the statistical distribution of yield (rather than the overall magnitude) will be compared between the two fields. This comparison will be replicated at each of the demonstration sites. If the shape of the distribution produced by the VRI system is significantly less correlated to the limiting soil physical properties, it may be possible to show that the VRI system has produced more uniform yields relative to a non-VRI system. This yield normalizing feature could enhance the economic viability of VRI and improve the qualitative performance in the form of better looking fields.

## **Demonstration Project**

The demonstration project was started in the spring of 2012 and is planned to be a multi-year effort. Three farms in the Colombia Basin agreed to participate in the demonstration. These farms were selected on the following bases: 1) high lift requirements for pumping (so that energy costs would be significant), 2) farm/irrigation managers that were willing to experiment with new technologies, 3) the manager must be willing to act on the irrigation recommendation provided by the integrated system, 4) greater than 500 acres in production. Each farm received the full complement of instrumentation, monitoring, and analysis described below effectively producing three replications of the demonstration. A summary of the fields used during the 2012 season is shown in Table 1.

Table 1 Summary of Demonstration Sites

Field Number	Integration Level	Crop (2012)	Size (Ac.)	Pumping Lift (ft.)	Location
18	Level 3	Winter Wheat	69		
11	Level 2	Winter Wheat	82	≈750	OR
17	Level 1	Alfalfa (mature)	125.3		
25		Potatoes	119.2		
102	Level 3	Alfalfa	125		
107	Level 2	Alfalfa	72	≈750	WA
109	Level 1	Alfalfa	125		
210		Alfalfa	125		
2	Level 3	Winter Wheat	136		
1	Level 2	Winter Wheat	155	≈125	ID
3	Level 1	Sugar beet	147		
6		Sugar beet	134		

The following components were installed or conducted at each farm:

- **Variable Rate Irrigation:** At each site, one pivot was retrofitted with a Valley Variable Rate Irrigation System (Valmont Industries, Inc.) and the panels were upgraded where necessary. The system was installed with 30 sprinkler banks. Valmont engineers supervising the installation selected the bank locations. Two of the farms are using re-use water (one from a potato processing plant, the other from animal waste). Because of concerns about potential valve clogging, these two sites were equipped with pneumatic valves rather than the typical hydraulically actuated valves.
- **Soil Mapping:** High-resolution soil maps were produced by a soil mapping service (Soil and Topography Information, Inc.) using a combination of electromagnetic sensing and physical soil sampling. The soils data was used to produce data layers for several soil properties including holding capacity, field capacity, and root zone restriction depth.
- **Flow Monitor:** ultrasonic flow meters (GE Panametrics) were installed on the pivots equipped with VRI. Water use records for the other fields will be derived from records kept the the software used to actuate the pivots.
- **Weather Monitoring:** Each farm was equipped with a primary weather station (Automata, Inc.) equipped with the sensors required to calculate reference ET. Additionally, each field had secondary a weather station placed well within the field boundary. This secondary weather station was equipped with temperature and relative humidity sensors and radio communication ET calculations were performed using the ASCE Standard equation (Allen, 2005).
- **Soil Moisture Monitoring:** each field was equipped with two neutron probe tubes and readings were taken on a weekly basis. In the fields where soil mapping occurred, the tubes were sited such that the tubes were approximately in the upper and lower quartiles of the Plant Available Water. In two fields at each farm, two types of capacitance probes were also installed (AquaCheck and Decagon 10HS). These probes were connected to the weather stations to take advantage of their telemetry capacity.
- **Localized Yield Modeling:** At each site, a local calibration of the FAO33 yield reduction model was produced using historical yield records. This calibration will enable generation of more precise yield maps and enable consideration of the value of these maps relative to default or regionally estimated yield calibrations.
- **Yield Mapping:** harvest monitors with gps tracking will be collected at the end of each season wherever possible (technical issues limited the collection of yield maps during the 2012 season). These data will be used to compare the spatial variability that was expected from the yield model.

In the alfalfa fields, infrared photographs were used and alfalfa yield distributions were estimated using the methods described by (Mitchell et al., 1990; Pinter et al., 2003; Hancock and Dougherty, 2007).

To facilitate comparison of various combinations of technologies, the fields are grouped in to three different levels of integration. Each level represents a significant improvement in scheduling precision and potential for water & energy savings relative to the previous level. *Level 1* is the equivalent to basic Scientific Irrigation Scheduling (SIS) where a water balance is used to drive irrigation scheduling. However, this capacity is enhanced by utilizing in-field temperature and relative humidity sensing to refine ET estimation, and neutron probe measurements to correct the water balance. *Level 2* builds on Level 1 by adding additional soil moisture monitoring and high resolution soil maps. The soil maps enable explicit consideration of spatial variability which will lead to more accurate yield estimates and more robust management capacity. The additional soil moisture monitoring enables increased temporal resolution and the opportunity to assess data integration issues with different sensors, data loggers, and telemetry. *Level 3*, the final level, adds VRI capacity.

## **Preliminary Results**

All of the previously mentioned instrumentation was installed during the spring of 2012. A series of logistical issues and technical problems prevented the full implementation that was originally planned. While these issues prevented implementation of the irrigation scheduling there was relevant progress towards the goal of a robust demonstration.

- The logistical and technical issues have highlighted several “bottlenecks” to data integration and have informed the development on the API.
- A majority of the environmental monitoring instrumentation was installed and operational for a significant portion of the irrigation season. These data enabled a robust calibration of the IMO system. A soil moisture graph, produced by IMO, is shown in Figure 3. The black squares are neutron probe measurements taken during the latter half of the irrigation season.
- The localized yield models were constructed for winter wheat and alfalfa.

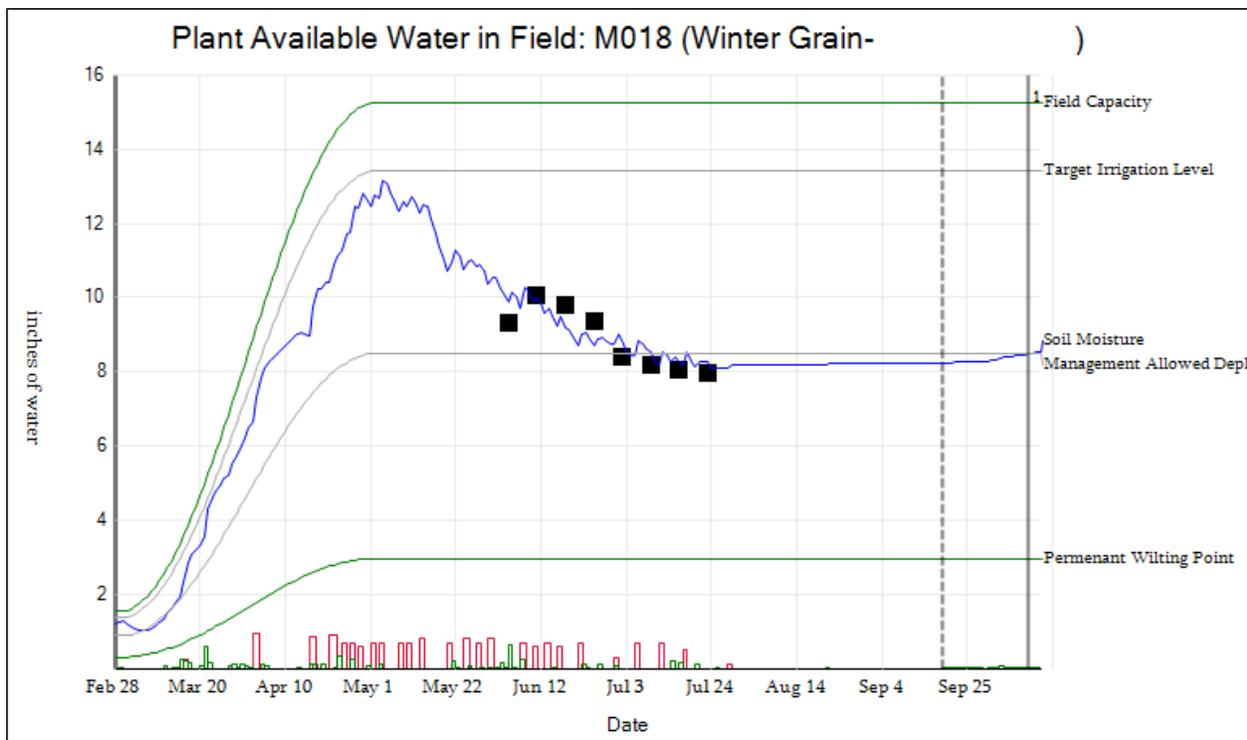


Figure 3 Trace of Estimated Soil Moisture produced by integrating soil moisture measurements, weather data, and water use records.

## Conclusion

A demonstration of the economic potential of optimal irrigation and variable rate irrigation was conducted on three farms in the Columbia Basin during the 2012 irrigation season. This demonstration employed substantial environmental monitoring, and was integrated (to the best degree possible) into a decision support system that generated irrigation recommendations. This demonstration is a multi-year effort and the subsequent years are anticipated to utilize a fully integrated management solution. It is also anticipated that there will be additional cooperating farms during the 2013 irrigation system.

## References

- Allen, R. 2005. The ASCE standardized reference evapotranspiration equation. Environmental and Water Resources Institute, American Society of Civil Engineers, Reston Va.
- Baulcombe, D. 2010. Reaping Benefits of Crop Research. *SCIENCE* 327(5967): 761.
- Bullock, D.S., M.L. Ruffo, D.G. Bullock, and G.A. Bollero. 2009. The Value of Variable Rate Technology: An Information-Theoretic Approach. *American Journal of Agricultural Economics* 91(1): 209–223.
- Clyma, W. 1996. Irrigation Scheduling Revisited: Historical Evaluation and Reformulation of the Concept. *In* Evapotranspiration and Irrigation Scheduling, Proceedings of the International Conference. American Society of Agricultural Engineers, San Antonio, TX.
- English, M., L. James, and C. Chen. 1990. Deficit Irrigation. II: Observations in Columbia Basin. *Journal of Irrigation and Drainage Engineering* 116(3): 413–426.

- English, M., and G. Nuss. 1982. Designing For Deficit Irrigation. *Journal of the Irrigation and Drainage Division-Asce* 108(2): 91–106.
- English, M., and S.N. Raja. 1996. Perspectives on deficit irrigation. *Agricultural Water Management* 32(1): 1–14.
- English, M.J., K.H. Solomon, and G.J. Hoffman. 2002. A Paradigm Shift in Irrigation Management. *J. Irrig. and Drain. Engrg.* 128(5): 267–277.
- Evans, R.G., and B.A. King. 2010. Site-Specific Sprinkler Irrigation in a Water Limited Future. *In 5th National Decennial Irrigation Conference Proceedings. ASABE, St. Joseph, Michigan, Phoenix, Arizona.*
- Evans, R.G., J. LaRue, K.C. Stone, and B.A. King. 2012. Adoption of site-specific variable rate sprinkler irrigation systems. *Irrigation Science* Available at <http://www.springerlink.com/index/10.1007/s00271-012-0365-x> (verified 8 October 2012).
- Hancock, D.W., and C.T. Dougherty. 2007. Relationships between blue- and red-based vegetation indices and leaf area and yield of alfalfa. *Crop Sci.* 47(6): 2547–2556.
- Hillyer, C. 2011. Optimal irrigation management : a framework, model, and application for optimizing irrigation when supplies are limited.
- Hillyer, C., M. English, C. Sayde, K. Hutchinson, and J. Busch. 2009. A Web-Based Advisory Service For Optimum Irrigation Management. *In World Environmental & Water Resources Congress. ASCE, Kansas City, MO.*
- Kranz, W.L., R.G. Evans, F.R. Lamm, S.A. O’Shaughnessy, and R.T. Peters. 2012. A REVIEW OF MECHANICAL MOVE SPRINKLER IRRIGATION CONTROL AND AUTOMATION TECHNOLOGIES. *Appl. Eng. Agric.* 28(3): 389–397.
- McCarthy, A.C., N.H. Hancock, and S.R. Raine. 2011. Advanced process control of irrigation: the current state and an analysis to aid future development. *Irrigation Science* Available at <http://www.springerlink.com/index/10.1007/s00271-011-0313-1> (verified 10 October 2012).
- Mitchell, A., P. PINTER, J. GUERRERO, C. HERNANDEZ, and V. MARBLE. 1990. SPECTRAL REFLECTANCE MEASUREMENTS OF ALFALFA UNDER SHEEP GRAZING. *Agron. J.* 82(6): 1098–1103.
- Mohan, S., and N. Arumugam. 1997. Expert system applications in irrigation management: an overview. *Computers and Electronics in Agriculture* 17: 263–280.
- Pinter, P.J., J.L. Hatfield, J.S. Schepers, E.M. Barnes, M.S. Moran, C.S.T. Daughtry, and D.R. Upchurch. 2003. Remote sensing for crop management. *Photogramm. Eng. Remote Sens.* 69(6): 647–664.
- Postel, S.L., G.C. Daily, and P.R. Ehrlich. 1996. Human appropriation of renewable fresh water. *SCIENCE* 271(5250): 785–788.
- Sadler, E.J., R.G. Evans, K.C. Stone, and C.R. Camp. 2005. Opportunities for conservation with precision irrigation. *J. Soil Water Conserv.* 60(6): 371–379.

Wolfe, D.W. 1990. Symposium on Scheduling of Irrigation for Vegetable Crops under Field Condition. p. 879–886. *In Acta Horticulturae*. ISHS, Maratea - Potenza (Italy).

Woodward, S.J.R., A.J. Romera, W.B. Beskow, and S.J. Lovatt. 2008. Better simulation modelling to support farming systems innovation: review and synthesis. *NEW ZEALAND JOURNAL OF AGRICULTURAL RESEARCH* 51(3): 235–252.